

ECO-CHAIN

LED LIGHT TOWER



- 23' maximum height
- 4 high efficiency LED heads equaling 600W (equivalent to 4000W metal halide)
- 25,833 sq ft of illuminated area
- Trime brand lights are adjustable and tiltable by hand with reinforced heavy duty brackets
- Telescopic vertical galvanized mast
- Main front panel selector
 - 120V-240V: 50A male outlet
 - 50A twist lock female both at 240V
- Second front panel
 - 20A plug & 20A GFCI both at 120V
- 5 - 10A 1 pole circuit breaker
- 3 units/single power source using 240V
- 2 units/single power source using 120V
- Connect multiple electric towers to the EL1250
- ECO-CHAIN can also be used with generator





Trime ECO-CHAIN Specifications

Mast, Dimensions & Weight	
Mast Height	23'
Wind Rating	50 mph
Fully Retractable Stabilizers	Y
Axle	Dexter Torsion
Drawbar	Tubular Steel
Unit Dimensions - Stowed	44" x 31" x 91"
Operating Dimensions	80" x 57" x 276"
Dry Weight	727
Operating Weight	727

*Specs subject to change



Applications

-  **Special Events**
-  **Rural & Hard to Reach Areas**
-  **Emergency Response**
-  **Construction & Work Sites**
-  **Gas, Oil & Mining Operations**
-  **Military Applications**

-  **No fuel cost**
-  **No carbon emission**
-  **No maintenance**
-  **No noise emissions**



Illuminated area = 25,833 sq ft

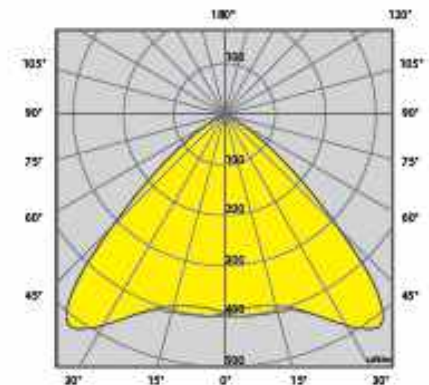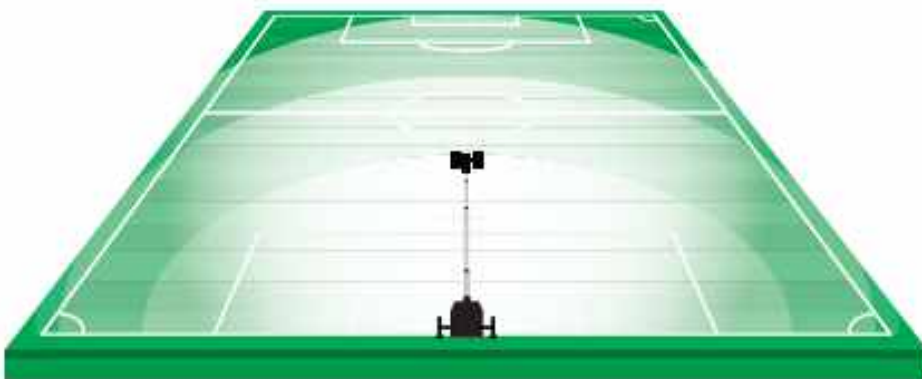

FTG Equipment Solutions
 100 Paper Place
 New Castle, DE 19720
 (855) 303-7900 ~ sales@ftgequipment.com
 www.ftgequipment.com



TRIME
 Lighting Towers Specialist